

Iluminación de emergencia
Emergency lighting

ESPECIFICACIONES SPECIFICATIONS



200-240V ~ 50/60Hz



IP54/IK10



3000K



Permanente/No permanente/Autotest
Maintained/Non maintained/Self-test



Sensor de microondas ajustable con switch
Microwave adjustable sensor with slide switch



Clase II
Class II



Marcado CE
CE marked



Garantía 3 años
3 year warranty




24 horas
24 hours




LiFePO4



CURVA FOTOMÉTRICA
PHOTOMETRIC CURVE

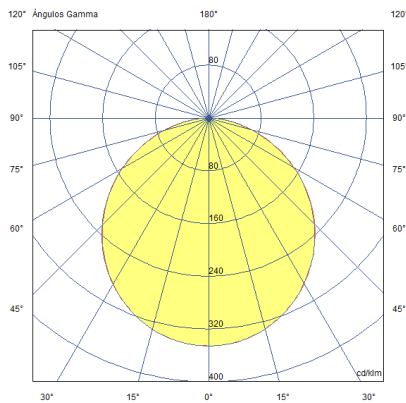

DIMENSIONES
DIMENSIONS

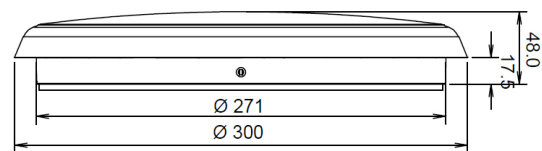

Código
Code

Modelo
Model



800007

E-SENSE SLIM 25 SENSOR/EMERGENCY



NP/AT

54

1.40

3

250

6.4V 1.5Ah

800007E

E-SENSE SLIM 25 EMERGENCY/ON-OFF



P/NP/AT

54

1.40

3

250

6.4V 1.5Ah

*Fabricado según la norma UNE-EN 60598-2-22/Manufactured according to standard UNE-EN 60598-2-22